



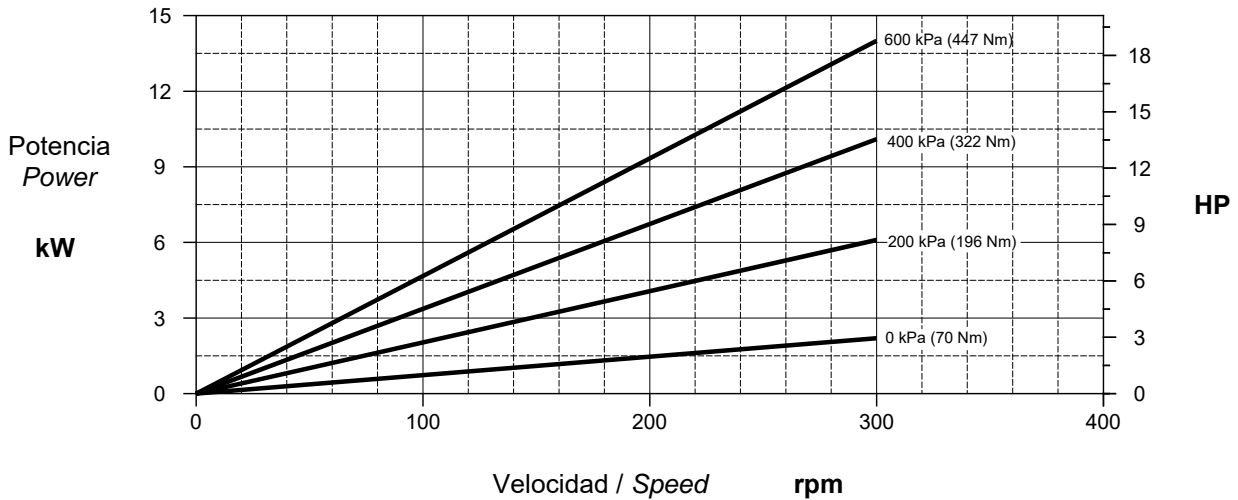

CURVAS CARACTERÍSTICAS
PERFORMANCE CURVES

Material estátor / Stator material NBR	Ø Boca asp. / Pump inlet Tolva / Hopper	Bomba / Pump KTE-100
Dureza estátor / Stator hardness 55 ±3 Shores	Ø Boca imp. / Pump outlet DN-120	
Par mín. arranque / Min. starting torque 245 Nm (178 lbt.ft)	Esfera máx. recom. / Max. sphere recom. Ø27 mm	Etapas / Stages 1

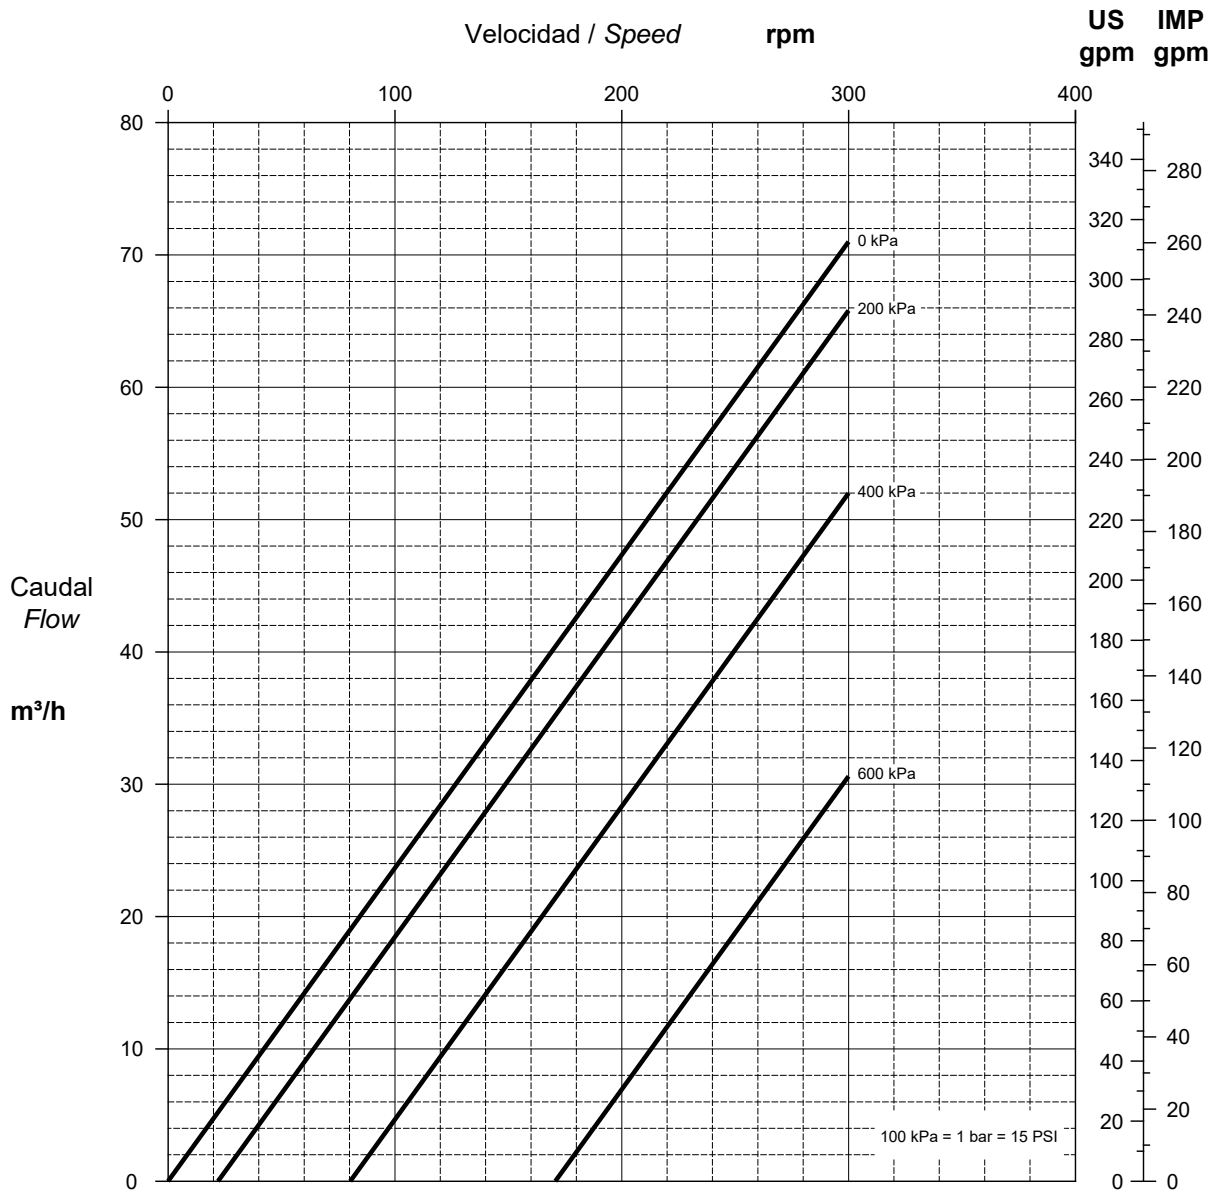

Los datos hacen referencia a agua limpia a 20°C / Performance data refer to clear water at 20°C

Tolerancia según ISO 9906:1999 Anexo A / Permissible tolerance ISO 9906:1999 Annex A